

Read and understand these instructions before installing luminaire

This luminaire is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding.

Retain these instructions for maintenance reference.




Luminaires must be installed by a qualified electrician in accordance with all national and local electrical and construction codes and regulation.



1

Make sure power is OFF

2

Mounting Options

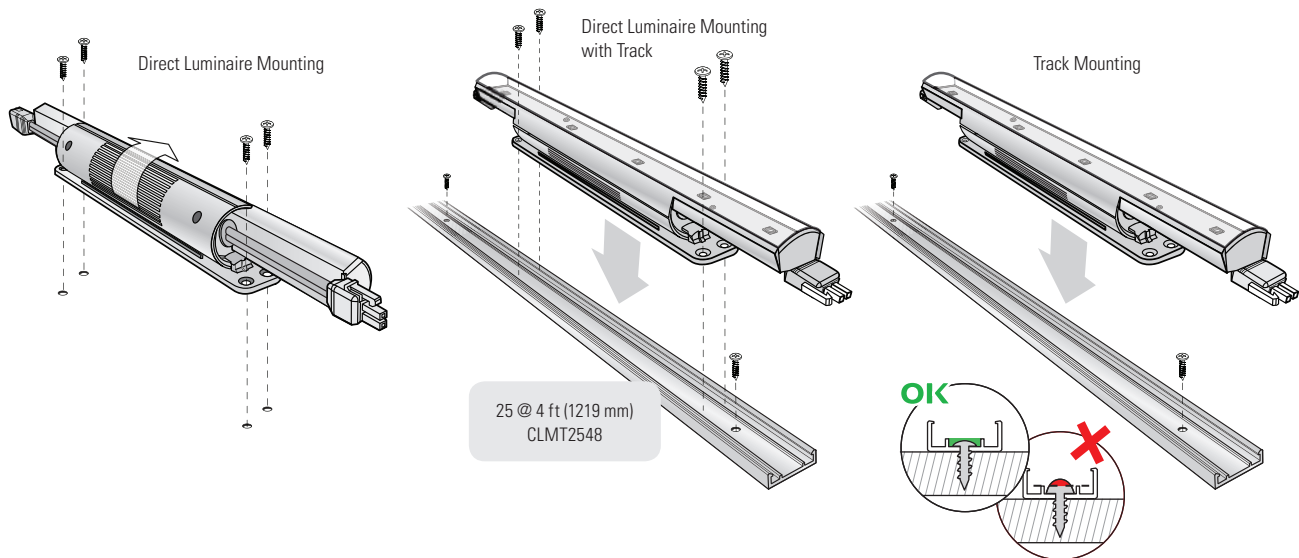

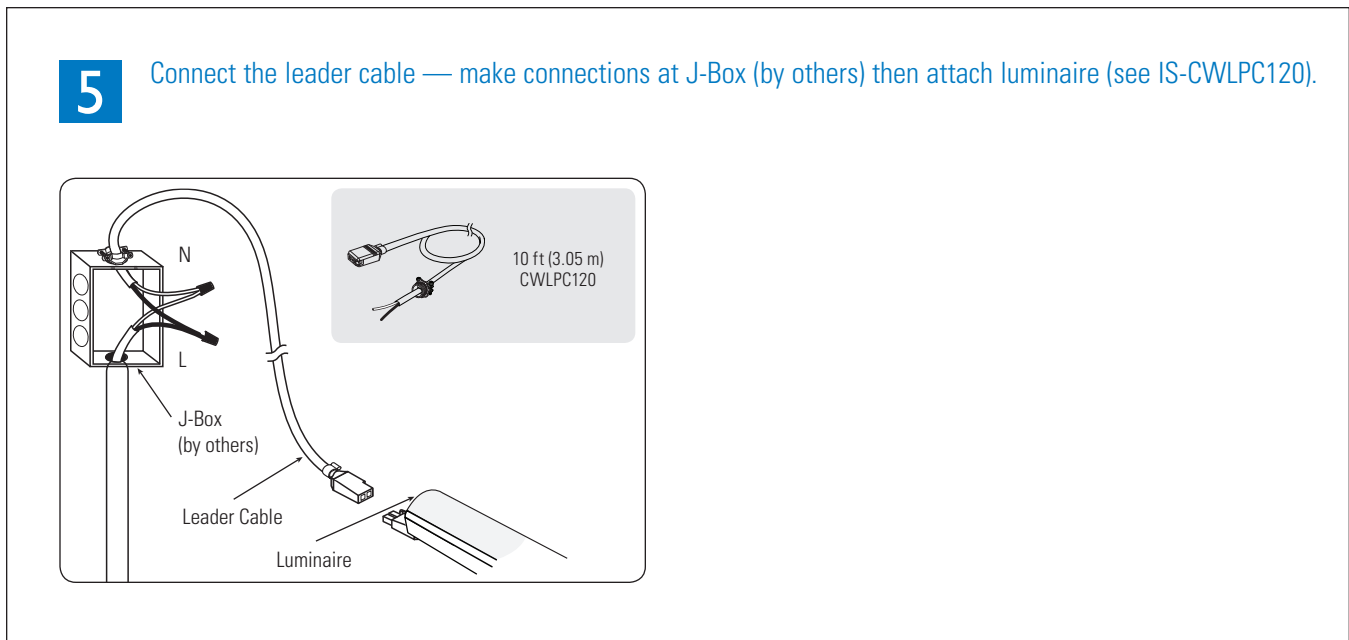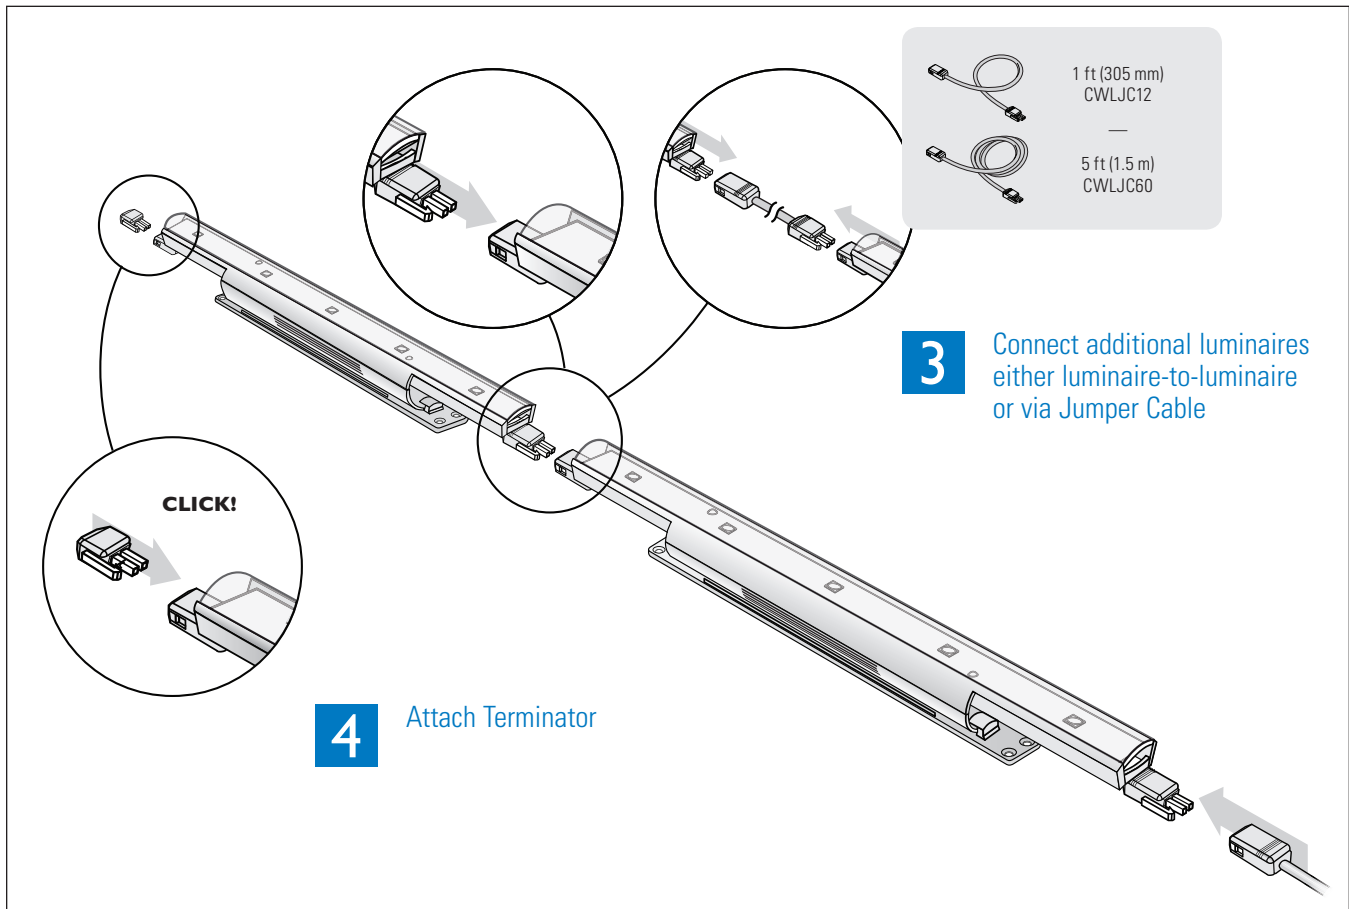


6

Turn the power ON

7

Rotate each luminaire to aim the 110° beam

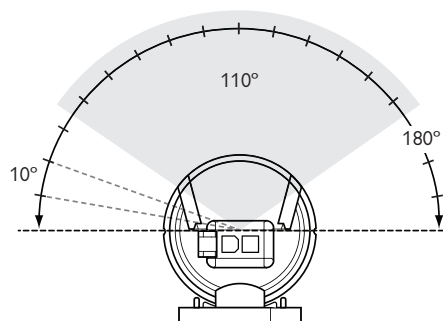

Item	Type	Part Number
Concealed White LED Adjustable, 12 inch (305 mm), 120 VAC	2800 K	CWL281212
	4200 K	CWL421212
Concealed White LED Adjustable, 6 inch (152 mm), 120 VAC	2800 K	CWL280612
	4200 K	CWL420612
Mounting Track	25 @ 4 ft (1219 mm)	CLMT2548
Leader Cable, Permanent	10 ft (3.05 m)	CWLPC120
Jumper Cable	1 ft (305 mm)	CWLJC12
	5 ft (1.5 m)	CWLJC60



Do not attempt to install or use a luminaire until you read and understand the installation instructions and safety labels.



Do not use a luminaire if the lens, housing, or power cables are damaged.



Luminaire have line voltage risk of shock and no user serviceable parts. Do not attempt to open them.



Do not use a luminaire for any voltage for which it is not rated. Do not exceed the specified voltage and current input for any luminaire.



Ensure that main power supply is off before installing or wiring a luminaire.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: 1) This device may not cause harmful interference. 2) This device must accept any interference received, including interference that may cause undesired operation.



Do not hot swap luminaire. Ensure that power to the series is off before connecting or disconnecting individual luminaires.



Caution: Led Radiation Do Not Stare Into Beam Class 2 Led Product